

BEST AVAILABLE COPY

Wilson et al. Docket: 1097-2 Sheet 2 of 6

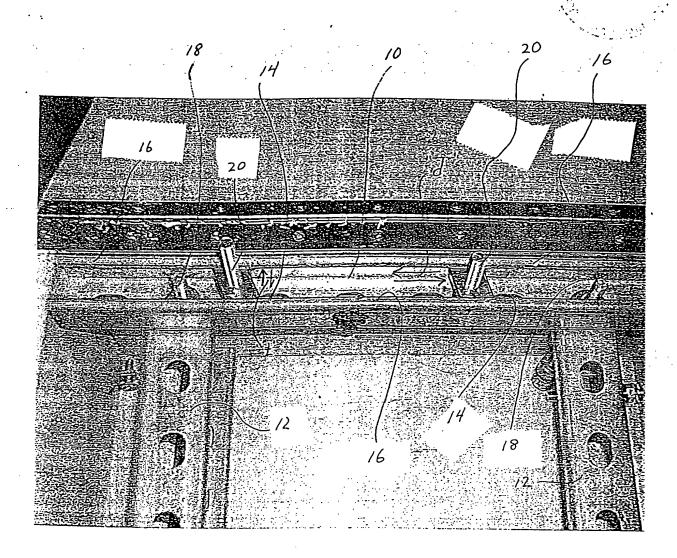


FIGURE 2

EST AVAILABLE COPY

Wilson et al. Docket: 1097-2 Sheet 3 of 6

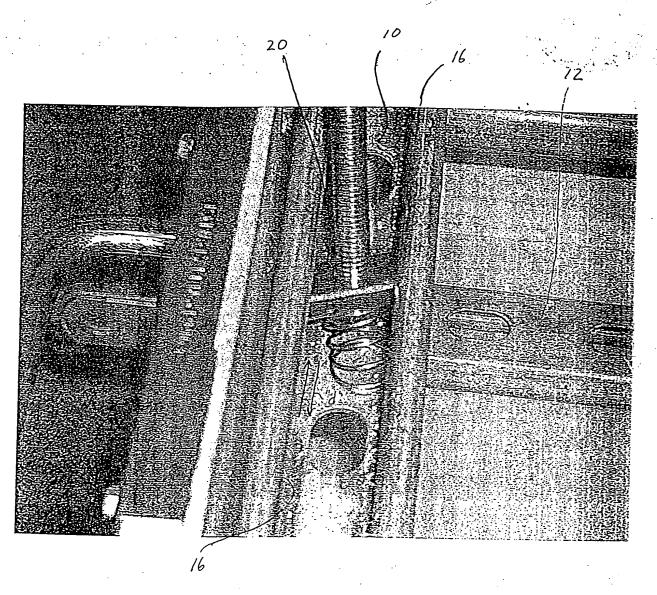


FIGURE 3

BEST AVAILABLE COPY

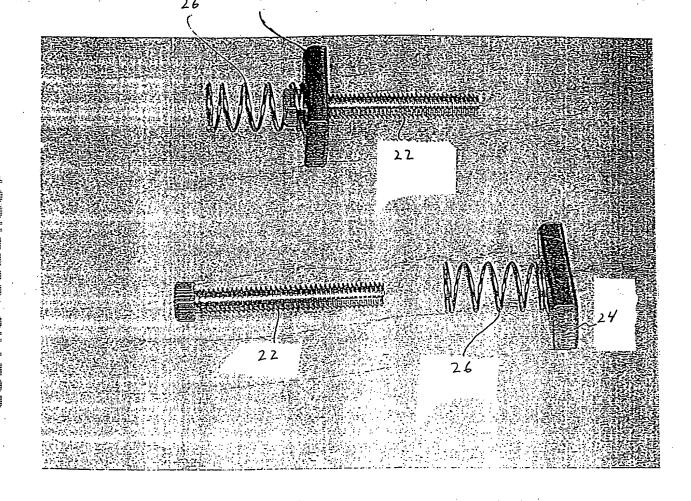


FIGURE 4

BEST AVAILABLE CO

DETERMINE SIZE OF FRAME BASED ON STEP 1 MACHINE SPECS ASSEMBLE LONGITUDINAL AND CROSS RAILS 572P 2. PER SPECE ICATIONS ASSEMBLE MOUNTING BOLTS WITHIN . STEP 3 LONGITUDINAL RAILS PREPARE CONCRETE -STEP 4 FOU-DATION POSITION ASSEMBLED. FRAME IN CONCRETE -5TEP 5 LET CONCRETE 6 4 ع 7 د ر Cull GENERALLY ALIGN MOUNTING BOLTS ~ STEP 7 WITHIN LONGITUDINAL RAILS LOWER MACHINE STEP 8 ON BOLTS SECURE BOLTS ~ STIP9 AND MACHINES

Wilson et al. Docket: 1097-2

Sheet 5 of 6

FIGURE 5

Wilson et al. Docket: 1097-2 Sheet 6 of 6

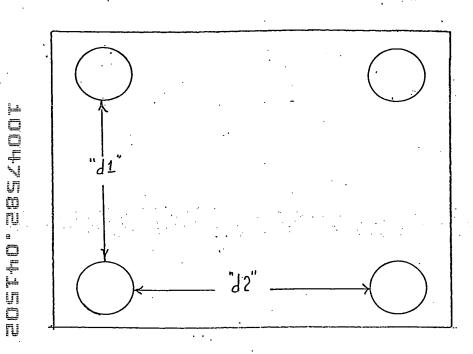


FIGURE 6